

Refrigeration Monitoring Systems Accessories

PRODUCTS FOR EXPANDING SYSTEM CAPABILITIES

MD-1™


The MD-1™ adds hands free occupancy detection to your walk-in. It is connected through low voltage wiring to your 75LC multi-monitor™.

The MD-1 will turn on and maintain your lights for the duration of your stay in the walk-in using the lighting control feature provided by the 75LC multi-monitor. Adding the MD-1 will increase safety by activating hands free Auto-panic™.

No reprogramming needed, the 75LC multi-monitor's Auto-detect™ will pick up a connected MD-1 and reprogram itself for the most common settings. The MD-1 comes mounted on a standard 4" x 2" plate, so installation is simplified.



- **Sensing Range:** 2.5' << 40'
- **MAX current:** 12mA
- **Operating temperature:** (-) 20°F << (+) 122°F
- **Physical Dimensions:**
3.39" H x 2.24" W x 1.71"
D/8.6 cm H x 5.7 cm W x 4.35 cm D
- **Weight:** 2.15 oz/61 g (net weight)

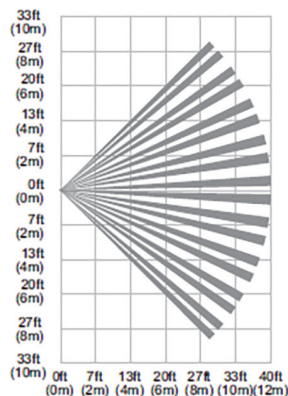


Illuminated Push Button for Panic/Entrapment Alarm

IP-1

IP-1 provides light control, panic, and auto panic inside the compartment. The IP-1 includes a low-voltage pilot light inside the compartment.

For DAC-55, DL-35, 75LC

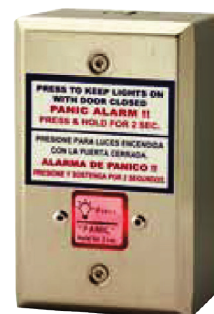

IP-2

IP-2 provides entrapment alarms. The IP-2 includes a low-voltage pilot light inside the compartment.

